



Shaker


Clean Styling. In the style and tradition of furniture from days gone by. Solid hardwood frames with veneer panel insets and solid hardwood drawer fronts. "Dry-fit" construction method uses concealed metal-to-metal fasteners, allowing component replaceability in the field.




features

- Core case good pieces use 1 1/4" x 3" solid hardwood posts with a 30-60 taper. Applied top and bottom rails are solid wood. A 3/4" hardwood veneer plywood panel is inset between posts, doweled and glued, resulting in a framed panel appearance.
- 3/4" hardwood veneer plywood back panels.
- Dry-fit construction using metal-to-metal connectors for component replaceability.
- 1" laminate work surface tops with solid hardwood edge banding, cut with a 120 degree back bevel.
- 4-sided glue and dowel drawer box construction using 1/2" hardwood veneer plywood.
- 1/4" drawer bottoms with waterproof vinyl face, mortised on all four sides of drawer box, and glued.
- Drawer fronts are removable and solid hardwood with integrated pulls.
- Nylon drawer slides, 3/4" extension.
- Finish is a multi-step process of sanding and a clear, aqueous, high solid urethane satin lacquer.

statement of line

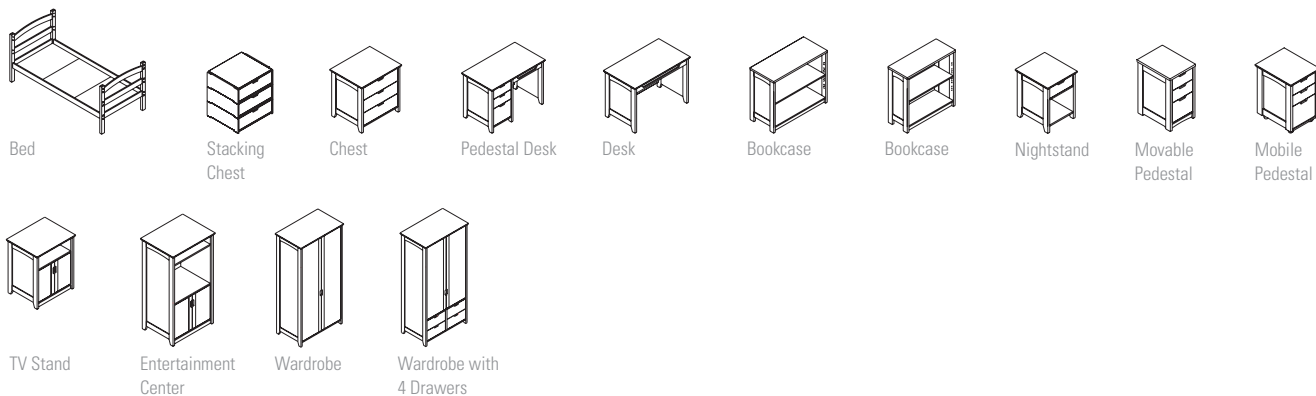

wood finish

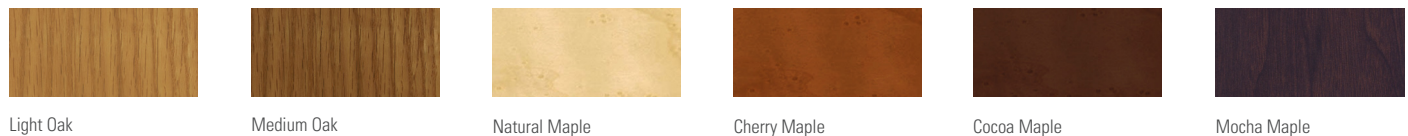

Color Disclaimer

Please order actual material samples for specifying purposes. Color accuracy is not guaranteed with these images.